

TECHNICAL DATA

THIS DOCUMENT IS NOT CONTRACTUAL


INSERTS FOR WOOD SERBOIS

41/TRB

61 avenue de l'Europe - 78140 Vélizy-Villacoublay - Tel : 00 33 (0)1 78 74 32 00 - Fax : 00 33 (0)1 78 74 32 01



MOUNTING

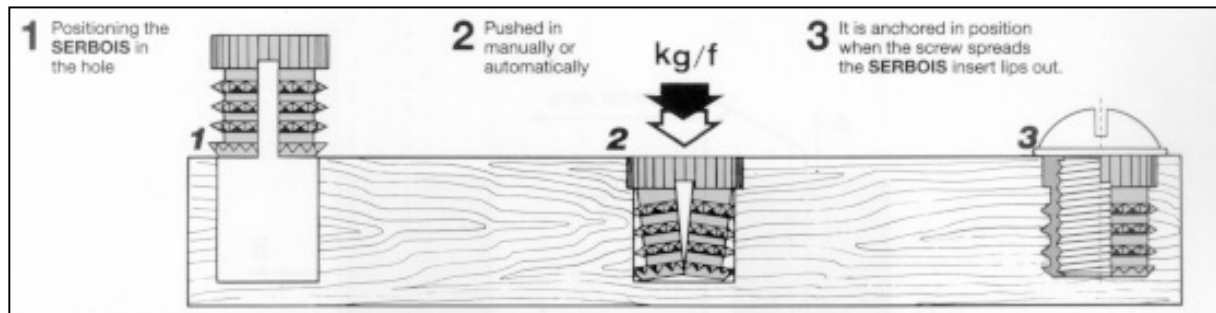

TECHNICAL CHARACTERISTICS

Standard model		Article reference SERBOIS TRB	D	Hole dimensions	
ISO Thread	H Height			d	P
M4	8	41/TRB 040 H 080	6	5	9
M5	8	41/TRB 050 H 080	7	6	9
M6	9,5	41/TRB 060 H 095	9	8	11
M8	10	41/TRB 080 H 100	10	9	11
M10	13	41/TRB 100 H 130	12	11	14

* Dimensions indicated in this table are not limited. If you require, we can manufacture **SERBOIS** to your dimensions.

Sample type	Max load (daN) along A		Max load (daN) along B		Max load (daN) along C	
	Average	Standard deviation	Average	Standard deviation	Average	Standard deviation
PPS	—	—	102	(a) 8,8	143,2	(a) 16,2 (b)
MDF	—	—	76,5	(a) 8,8	127,8	(a) 8,5
C	163,6	(a) 34,3	211,2	(a) 13,1 et (b)	221,7	(a) 16,5
H	156,0	(a) 8,0	241,2	(a) 5,9	233,1	(a) 8,3
S	98,0	(a) 15,2	108,4	(a) 27,9 et (b)	98,7	(a) 3,8 et (b)