


TECHNICAL DATA

THIS DOCUMENT IS NOT CONTRACTUAL



31/TP

SERBLOC STEEL FLAT HEAD OPEN END

6 rue Nationale 92100 BOULOGNE-BILLANCOURT Tél : 01 46 21 05 32 Fax : 01 46 21 00 76



Thickness to be
crimped unlimited
standard

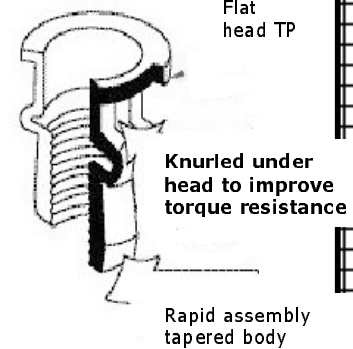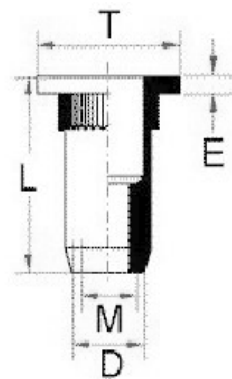

Metric thread	Part n° STEEL	Part n° SS	Grip range	Body Ø D	Head dim E	Head Ø. T	Length L	Hole size P
M3	3 TP 15	3 TP 15 X	0.5 - 1.5	5.0	0.8	7.0	8.6	5.1
M3	3 TP 25	3 TP 25 X	1.5 - 2.5	5.0	0.8	7.0	9.6	5.1
M3	3 TP 35	3 TP 35 X	2.5 - 3.5	5.0	0.8	7.0	10.6	5.1
M4	4 TP 15	4 TP 15 X	0.5 - 1.5	6.0	0.8	8.0	10.5	6.1
M4	4 TP 30	4 TP 30 X	1.5 - 3.0	6.0	0.8	8.0	11.3	6.1
M4	4 TP 40	4 TP 40 X	3.0 - 4.0	6.0	0.8	8.0	12.3	6.1
M5	5 TP 15	5 TP 15 X	0.5 - 1.5	7.0	1.0	9.0	11.7	7.1
M5	5 TP 30	5 TP 30 X	1.5 - 3.0	7.0	1.0	9.0	13.2	7.1
M5	5 TP 45	5 TP 45 X	3.0 - 4.5	7.0	1.0	9.0	14.7	7.1
M6	6 TP 20	6 TP 20 X	1.0 - 2.0	9.0	1.5	11.0	14.5	9.1
M6	6 TP 35	6 TP 35 X	2.0 - 3.5	9.0	1.5	11.0	16.0	9.1
M6	6 TP 50	6 TP 50 X	3.5 - 5.0	9.0	1.5	11.0	17.5	9.1
M8	8 TP 25	8 TP 25 X	1.0 - 2.5	11.0	1.5	14.0	16.3	11.1
M8	8 TP 40	8 TP 40 X	2.5 - 4.0	11.0	1.5	14.0	17.8	11.1
M8	8 TP 55	8 TP 55 X	4.0 - 5.5	11.0	1.5	14.0	19.3	11.1
M10	10 TP 25	10 TP 25 X	1.0 - 2.5	13.0	1.5	16.0	19.8	13.1
M10	10 TP 40	10 TP 40 X	2.5 - 4.0	13.0	1.5	16.0	21.3	13.1
M10	10 TP 55	10 TP 55 X	3.0 - 5.5	13.0	1.5	16.0	22.8	13.1
M12	12 TP 30	12 TP 30 X	1.5 - 3.0	16.0	2.0	20.0	24.9	16.1
M12	12 TP 45	12 TP 45 X	3.0 - 4.5	16.0	2.0	20.0	26.4	16.1
M12	12 TP 60	12 TP 60 X	4.5 - 6.0	16.0	2.0	20.0	27.9	16.1